



VARAVON

www.VARAVON.com

811 Mecha-zone Ezen, Hagun-ri, Yangchon-eup, Gimpo-si, Gyeonggi-do, Korea 415-843

Email : OK@VARAVON.COM / Korea Tel : + 82 70 8630 6231

GIMBAL STEADY

Gyro stabilizer



Official Release Nov.

- The screw-type fine centering adjustment device on the each axis
- A sturdy frame that prevent external shock and held resonance
- Fast processing speed of the circuit (32bit)
- Easy (or Simple) Operation with the joystick
- Wide scalability through two-way communication
- Simple setting with smart phones equipped with Bluetooth



GIMBAL STEADY

For Gopro



Comparison Table

	A	B	VARAVON
MPU	AVR 8bit	ARM 32Bit	ARM 32Bit
Chipset	Atmega328p	STM32F103-C8T6	STM32F103-RCT6
Program Memory	32KB	64KB	256KB
Clolck	16Mhz	72Mhz	72Mhz
Gyro/Accel	MPU-6050	MPU-6050 x2	MPU-6050 x2
Magnetometer	5883L	5883L	5883L
External control	None	None	Joystick
JoystickDriver	L6234 x2	L6234 x3	L6234 x3
Axis	2-Axis	3-Axis	3-Axis
Operating Voltage	24V available	24V available	24V available

WIRE CAM

Unique Angle



Official Release Nov.



SLIDECAM

Variety of slidecam are able to used by from amateur to professional




Slidecam S



Slidecam Lite

LINE UP & SPEC

OliviaTECH Slidecam review

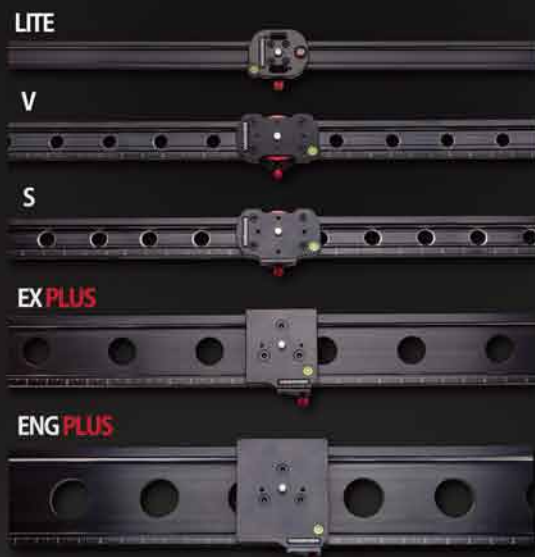

	LITE	V	S	EX PLUS	ENG PLUS
Length / weight	600 mm (1.2 kg) 800 mm (1.4 kg) 1000 mm (1.6 kg) 1200 mm (1.8 kg)	600 mm (2.0 kg) 800 mm (2.3 kg) 1000 mm (2.6 kg) 1200 mm (2.9 kg)	900 mm (2.6 kg) 1200 mm (3.5 kg) 1500 mm (4.2 kg) 2000 mm (5.3 kg)	800 mm (3.5 kg) 1000 mm (4.1 kg)	1000 mm (7.1 kg)
Slide the width	34mm / 1.3 inch	45mm / 1.7 inch	47mm / 1.9 inch	88mm / 3.5 inch	120mm / 4.8 inch
Shaft Size	6mm / 0.23 inch	6mm / 0.23 inch	8mm / 0.31 inch	6mm / 0.23 inch	10mm / 0.39 inch
Bearing ϕ	17mm / 0.67 inch	17mm / 0.67 inch	23mm / 0.94 inch	17mm / 0.67 inch	30mm / 1.18 inch
Bearing height	7.97mm / 0.31 inch	7.97mm / 0.31 inch	11.06mm / 0.43 inch	7.97mm / 0.31 inch	11.06mm / 0.43 inch
Maximum load	15kg / 33lb	20kg / 44lb	22kg / 48.5lb	30kg / 66.1lb	40kg / 88.1lb
Bearing structure					

MULTI FINDER

Low Angle Viewfinder



Low Angle Multi finder as is possible.

MULTI FINDER UNI PLUS



- For CANON 1DC



- For NIKON D4



- For UNIVERSAL



*- For CANON
5Dmark3*



*- For NIKON
D800*



*Multi finder
review site*



TILT JIB & PANNING SYSTEM

- TILT UP AND DOWN
- PANNING RIGHT AND LEFT
- MOUNTED ON TRIPOD
- LIGHT WEIGHT



TILT JIB
T3 2.75m
114inch

TILT JIB
T4 3.8m
150inch

TILT JIB
T1 1m
39inch

TILT JIB
T2 1.9m
75inch

Maximum load : 3kg / 6.6lb

Optimal load : 1~2kg

Not include the tripod and weight.

TILTING & PANNING SYSTEM



MOTORROID

Slidecam Motorized KIT

Motor & Controller

Integrated

OliviaTECH *Special Edition*
MOTORROID 800, 1000



Motorroid V1.2

- High speed : 10sec / 1m
- Low speed : 5min / 1m

TIMEROID

Moving Time-lapse



One Axis Sliding

- Simple one axis the body
- Climbing rope available

**Timelapse
Controller**

ARMOR POKET

FOR BMPCC CAGE



CNC machining
Convenient Design
Compatible with multi-Finder



VARAVON TRIPOD & ETC

815 B19 VIDEO HEAD



BABY TRIPOD T1



LOW BALL ADAPTER

